

LASERSPEED[®] LENGTH & SPEED GAUGE

NEW!
0.03% Accuracy
Improves Performance.
Delivers Additional
Savings.



Accurate, non-contact
length and speed
measurements with
laser precision

- ▶ Measure products with the highest degree of accuracy and repeatability
- ▶ Perform direct, non-contact measurements on all types of products
- ▶ Meets MID (Measuring Instruments Directive) 2014/32/EU requirements
- ▶ Direct replacement for contact encoders
- ▶ Realize the lowest total cost of ownership



Non-Contact Speed & Length Gauge

A breakthrough in electro-optics design enables the Beta LaserMike LaserSpeed® Series gauge to produce highly accurate, non-contact speed and length measurements at a surprisingly low cost. To accomplish this, the LaserSpeed gauge uses Laser Doppler Velocimeter technology coupled with autocorrelation, the most advanced digital signal processing algorithm and new single-chip integrated circuit technology.

LaserSpeed has no moving parts, uses 100% solid-state digital technology, and is permanently calibrated—resulting in significant time and money savings. With **±0.03% accuracy** and **±0.02% repeatability** for the full velocity range, LaserSpeed gauges are ideal replacements for contact encoders which are prone to measurement errors caused by slippage, dirt build-up, and day-to-day wear problems.



With Zero Speed
and Automatic
Direction Detection!

The LaserSpeed® Advantage

Benefits

- ▶ High accuracy and repeatability
- ▶ Direct replacement for tachometers
- ▶ No slippage, no-marking and not affected by material surface or color
- ▶ No moving parts to wear out
- ▶ Permanently calibrated
- ▶ European certified length measurement system that meets **MID (Measuring Instruments Directive) 2014/32/EU** requirements (LS9000 only)
- ▶ Low cost of ownership
- ▶ Compact, rugged industrial sensor operates on +24VDC
- ▶ “Smart” gauge—optics, electronics and I/O in the gauge

Range of Applications

The LaserSpeed gauge is well suited for a range of applications, including, but not limited to, measuring length and speed of:


- ▶ Wire, cable and optical fiber
- ▶ Paper and corrugated products
- ▶ Web products
- ▶ Non-woven products
- ▶ Rubber tube and hose
- ▶ Plastic pipe, profile and tube
- ▶ Plastic films and tapes
- ▶ Building materials

Accessories



Airwipe and Quick-Change Window

Designed for dirty environments, the airwipe and quick change window help to ensure minimal downtime for cleaning.



Breakout Box/Power Supply

Provides easy access to all gauge inputs and outputs. Also provides power to the LaserSpeed.



Environmental Housing

Provides heavy-duty, double-sealed protection against hot and humid environments.



Accessory Case

A convenient case to hold the LaserSpeed and all accessories safe and secure.



DP700 Display **NEW!**

Displays LaserSpeed length, velocity, quality factor, and gauge status, and lets you configure gauge and process settings. Includes Ethernet/IP and Modbus for Allen Brady controls.



Adjustable Mounting Bracket

Enables you to adjust or tilt the gauge in three directions to achieve the desired measurement angle for your unique application.

Technology

Contact Tachometers vs. LaserSpeed

Contact tachometers are typically used in manufacturing applications for length and speed measurement. However, there are a variety of problems with the use of contact length measurement that can be avoided by replacing tachometers with LaserSpeed:

Normal Tachometer Problem:	LaserSpeed Solution:
1. Measurement errors and inaccuracy caused by: product slippage, dirt build-up, day-to-day wear problems	Non-contact measurement ensures high accuracy and repeatability
2. High cost of ownership due to the need to regularly replace parts and recalibrate	Use of 100% solid-state digital technology with no moving parts ensures permanent calibration and low cost of ownership
3. Contact measurement can mark or damage the product	Non-contact measurement ensures no marking or damage of the product

Laser Doppler Velocimetry Principle

LaserSpeed uses dual-beam laser interferometer technology to measure product velocity (speed), which is integrated over time to measure length.

Fringe distance is a function of laser wavelength and beam angle:

$$d = \frac{\lambda}{2 \sin \kappa}$$


Velocity is distance over time:

$$v = \frac{d}{t}$$

Period is the inverse of frequency:

$$t = \frac{1}{f}$$

Velocity is integrated to find length:
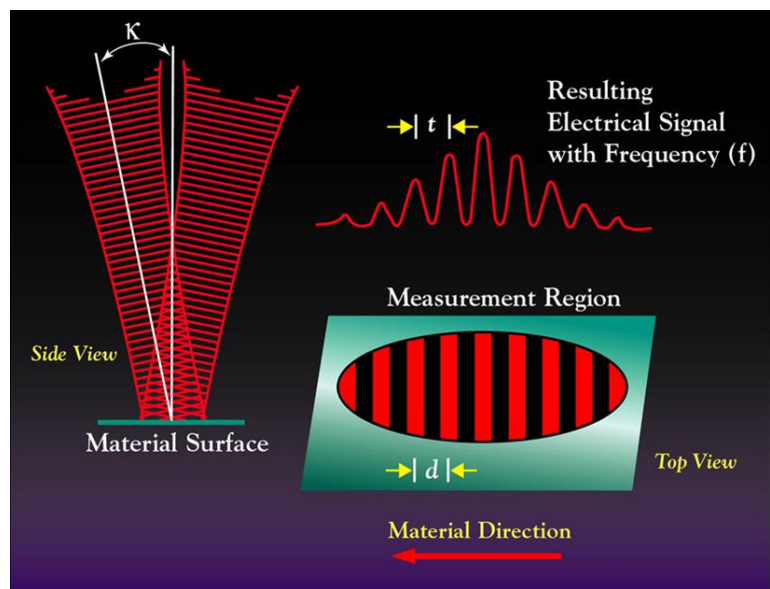
$$L = \int_0^T v dt$$


LaserSpeed Safety Enclosure

Designed to meet recognized industrial safety regulations, this enclosure protects operators from direct or incidental exposure to laser beams. Includes laser safety shutter control switch, linear height adjustment and position indicator, optional roller guides for products up to 50 mm, and optional height stands. Accommodates LS4000, LS8000, LS9000, and LS9000 MID gauges with either 300 or 600 mm stand-off distances.



Laser Safety Information

VISIBLE AND INVISIBLE LASER RADIATION
AVOID EXPOSURE TO BEAM
CLASS 3B LASER PRODUCT
 PEAK POWER 30mW
 WAVELENGTH 650-810 nm

Complies with EN60825-1:2001. Complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated July 26, 2001.



WARNING - NO USER SERVICEABLE PARTS. REFER SERVICING TO QUALIFIED SERVICE PERSONNEL.

The following safety features required to comply with the Bureau of Radiological Health Class IIIb laser requirements are included:

- Key-operated power switch on optional controller
- Laser indicator light on supply and laser
- Delayed laser startup-laser indicator light on prior to laser radiation
- Laser beam blocking device
- Interlock capability for remote shut-off

	-301 (LS4000 only)	-303	-306	-310
Standoff Distance	100 mm (4 in.)	300 mm (12 in.)	600 mm (24 in.)	1000 mm (39.4 in.)
Speed Range: LS4000	0.2 to 1700 m/min (0.7 to 5500 ft/min)	0.4 to 4000 m/min (1.3 to 13100 ft/min)	0.8 to 8000 m/min (2.6 to 26200 ft/min)	1.0 to 12000 m/min (3.2 to 39400 ft/min)
Speed Range: LS9000	-1700 to 1700 m/min (-5500 to 5500 ft/min)	-4000 to 4000 m/min (-13100 to 13100 ft/min)	-8000 to 8000 m/min (-26200 to 26200 ft/min)	-12000 to 12000 m/min (-39400 to 39400 ft/min)
Measurement Depth of Field	15 mm (0.6 in.)	35 mm (1.4 in.)	50 mm (2 in.)	75 mm (3.0 in.)

	LS4000-3	LS9000-3
Measurement Rate	>20000/s	100,000/s
Starting/ Ending Length Correction	- No	- Yes
Serial I/O Data Available	- RS-232 - Speed, Length - Quality Factor, Status	- RS-232 / RS-422 - Speed, Length - Quality Factor, Status
Baud Rate	- 230K, 115K, 57.6K, 38.4K, 19.2K, 9.6K, 4.8K	- 230K, 115K, 57.6K, 38.4K, 19.2K, 9.6K, 4.8K
Status via Serial I/O or Optional Ethernet	- Laser at Temperature - Laser On - Shutter Open - Gauge Temperature	- Laser at Temperature - Laser Interlock - Shutter Position - Valid Measurements - Material Present - System Ready
Quadrature Pulse Output 1	- Opto isolated - Scaleable pulse amplitude (5-24V) - Fixed at 1000 pulses/unit - 250 KHz max pulse rate	- Opto isolated - Scaleable pulse amplitude (5-24V) - Selectable pulses/unit - 250 KHz max pulse rate
Output 2	- Scaleable pulse amplitude (5-24V) - Selectable pulses/unit - 250 KHz max pulse rate	- RS-422 Drivers - Selectable pulses/unit - 5 MHz max pulse rate
Index pulse output	- Yes/programmable	- Yes/programmable
Gauge Power	- 24VDC (± 4 VDC) @ 1 Amp - 50 mV ripple max	- 24VDC (± 4 VDC) @ 2.0 Amp - 50 mV ripple max
Gauge Size	203 x 159 x 81mm (8.0 x 6.3 x 3.2in.)	203 x 159 x 95.2mm (8.0 x 6.3 x 3.75in.)
Gauge Weight	2.55 kg (5.6 lbs)	3.4 kg (7.5 lbs)
Temperature Range	-5 to 45°C (21 to 113°F)	- 5 to 45°C (21 to 113°F)
Output Rate	2 to 32 ms in 2 ms increments	1 to 2000 ms in 1 ms increments
Spot Size	- 3 x 5 mm - 1.75 x 5 mm L Version	- 3 x 5 mm (-310: 3 x 7)

All LaserSpeed Gauges

Acceleration Rate	>500 m/s ²	Cooling* Air - Pressure: Less than 70 kPa (< 10 PSI) - Flow Rate: 50 l/min (2 SCFM) Typical Water - Pressure: Less than 207 kPa (< 30 PSI) - Flow Rate: 1.0 to 3.8 l/min (0.26 to 1 gpm) 1.5 l/m (0.4 gpm) Typical - Coolant Temp: 5 to 45°C (41 to 113°F)
Repeatability	$\pm 0.02\%$	
Accuracy	$\leq \pm 0.03\%$ of reading	
User Isolated Voltage	5 to 24 VDC (300mA)	
Relative Humidity	Non-condensing	
Units of measure	Selectable	Ethernet -Optional - 10/100, UDP, TCP, Telnet - Speed, Length, Quality Factor, Status
Speed	m/min, m/s, ft/min, ft/s, in/min, mm/sec, yards/in, yards/sec	
Length	m, ft, in, yards	Degree of Protection IP67
Analog Output	- 0-2V - Velocity or quality factor	Temperature Range -5 to 45°C (21 to 113°F)

*For ambient temperatures beyond gauge specification.

NDC Technologies is represented in over 60 countries worldwide. www.ndc.com/betalasermike

a **spectris** company

NDC Americas
Tel: +1 937 233 9935
Email: sales@betalasermike.com

NDC China
Tel: +86 21 6113 3617
Email: sales@betalasermike.com

NDC India
Tel: +91 124 2789507
Email: sales@betalasermike.com

NDC United Kingdom
Tel: +44 1621 852244
Email: sales@betalasermike.com

NDC SE Asia
Tel: +65 91994120
Email: sales@betalasermike.com



In line with its policy of continuous improvement, NDC reserves the right to revise or replace its products or services without prior notice. The information contained in this document may not represent the latest specification and is for indicative purposes only.

Document #: C-BROC-SCAN-LaserSpeed_WC-EN-2017FEB15
Date of Issue: February 2017
© NDC Technologies 2017

Measured by Commitment